



DNH

HEAD OFFICE, NORWAY
DNH AS

Phone..... + 47 35 98 56 00
Fax..... + 47 35 98 56 10
E-mail..... dnh@dnh.no
Web-Site..... www.dnh.no




ENGLAND
DNH WW Ltd
Phone..... + 44 1908 275 000
Fax..... + 44 1908 275 100
E-mail..... dnh@dnh.co.uk

GERMANY
DNH GmbH
Phone... + 49 040 6569 30-0
Fax..... + 49 040 6569 30-30
E-mail..... dnh@dnh.de

USA
DNH Speakers Inc
Phone..... + 1 484 494 5790
Fax..... + 1 484 494 5793
E-mail..... dnh@dnhspeakers.com


CAP-15WCR(T)

ISO 9001 CERTIFIED

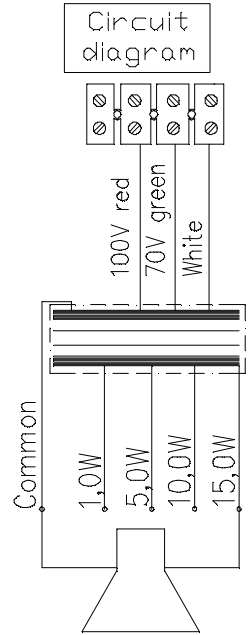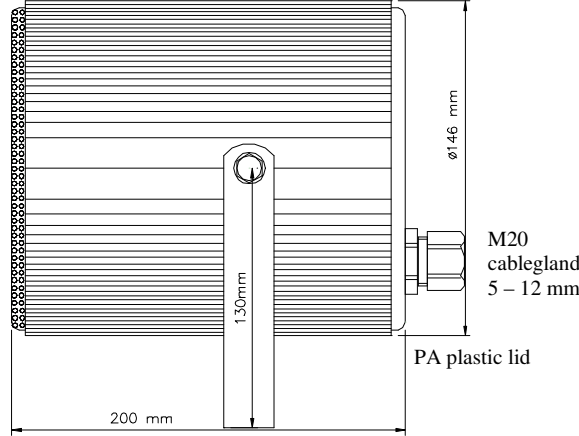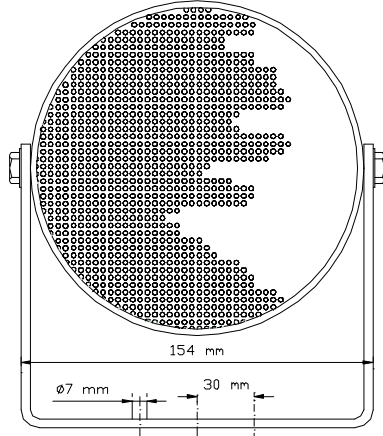

Sound pressure levels at 1W/1m

SPL vs Freq

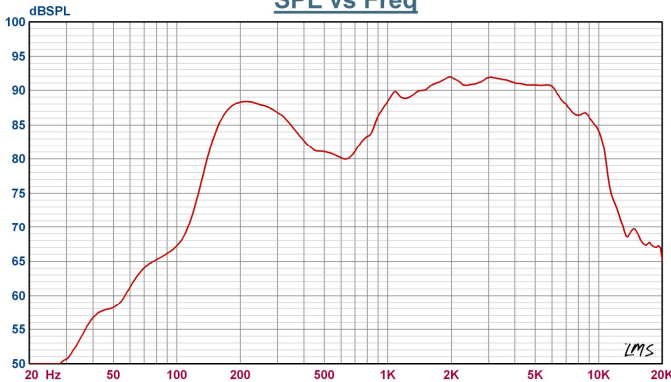

Specifications

Material / Color	(Aluminum/PA)/RAL9010 or anodized
Mounting	Bracket
Termination	Inside screw terminal
Weight w/transformer	2,4 kg
IP-rating	55
Max. / min. amb. temp	90°C / -40°C
Rated / max. power	15 W / 15 W
SPL 1W/1m	85 dB
SPL rated power	96 dB
Effective freq. range	125 – 12000 Hz
Dispersion (-6dB) 1kHz / 4kHz	170° / 55°
Directivity factor, Q	NA
Options	Impedances, colors, labels

Installation, Operation and Maintenance Procedures

- Fasten bracket with 2 – 3 screws.
- Remove lid by 4 screws, lead cable through the cable gland and connect to terminal 70V (white – green) or 100V (white – red).
- Choose required power on the transformer.
- Screw lid back into place by 4 screws with a torque of 1 - 2 Nm to assure the IP rating.
- CAP-15WCR(T) is designed for clean room applications.
- For optimum performance, always use the correct voltage / power and operate within the frequency limits as stated.
- Do not open loudspeaker when energized.
- This loudspeaker is supplied with a 2 year warranty against defective workmanship.

DNH reserves the right to alter specifications without notice

