



# DNH

HEAD OFFICE, NORWAY  
DNH AS

Phone..... + 47 35 98 56 00  
Fax..... + 47 35 98 56 10  
E-mail..... dnh@dnh.no  
Web-site..... www.dnh.no


ENGLAND  
DNH WW Ltd  
Phone..... + 44 1908 275 000  
Fax..... + 44 1908 275 100  
E-mail..... dnh@dnh.co.uk

GERMANY  
DNH GmbH  
Phone... + 49 040 6569 30-0  
Fax..... + 49 040 6569 30-30  
E-mail..... dnh@dnh.de


USA  
DNH Speakers Inc  
Phone..... + 1 484 494 5790  
Fax..... + 1 484 494 5793  
E-mail..... dnh@dnhspeakers.com

## SAFE-561IP(T)

ISO 9001 CERTIFIED

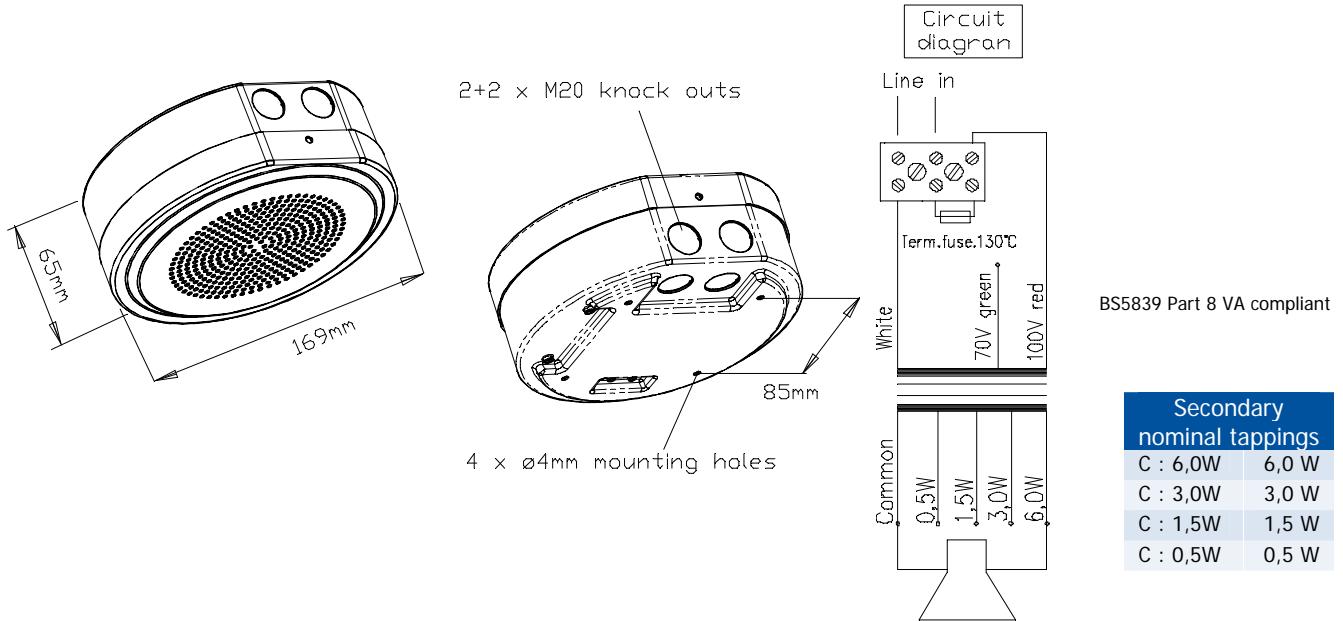

Sound pressure levels at 1W/1m P-6/15B

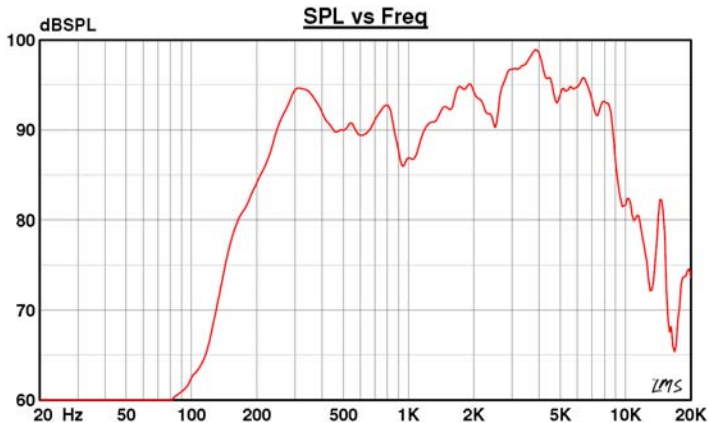

Specifications

Material / Color	Steel / White
Mounting	Four screws
Termination	Ceramic terminals
Weight	1,3 kg
IP-rating	55
Max. / min. amb. temp	90°C / -20°C
Rated / max. power	6 W / 6 W
SPL 1W/1m	90 dB
SPL rated power	97 dB
Effective freq. range	180 – 13000 Hz
Dispersion (-6dB) 1kHz / 4kHz	187° / 77°
Options	Impedances, colors, labels

### Installation, Operation and Maintenance Procedures

- Mount cabinet to wall/ceiling with 4 suitable screws.
- If 70V, replace red cable with the green cable in the terminal.
- Connect cable to terminal and fasten the front part to the cabinet with 2 provided screws.
- For optimum performance, always use the correct voltage / power and operate within the frequency limits as stated.
- Do not open loudspeaker when energized.
- This loudspeaker is supplied with a 2 year warranty against defective materials and workmanship.

DNH reserves the right to alter specifications without notice

